

FBM203/b/c/d Platinum/Nickel/Copper RTD Input Module



HighFive PLC
sales@5gplc.com
+86 13 306036024

The FBM203/b/c/d Platinum/Nickel/Copper RTD Input Modules contain eight resistance temperature detector (RTD) input channels.

OVERVIEW

Each input channel of the FBM203/b/c modules accept a 2- or 3-wire RTD sensor input, within a 0 to 320 ohm (FBM203), 0 to 640 ohm (FBM203b), or 0 to 30 ohm (FBM203c) resistance range. Each input channel of the FBM203d accepts a 4-wire RTD sensor input, within a 0 to 320 ohm resistance range. Each analog input is galvanically isolated from other channels and ground.

The modules perform the signal conversion required to interface the electrical input signals from the field sensors to the optionally redundant fieldbus.

The FBM203/b/c/d modules execute an analog input application program, which provides conversion time (on a per module basis) and configurable options for Rate of Change Limits.

Two types of passive termination assemblies are available for the FBM203/b/c modules:

- ▶ DIN rail mounted TAs, similar to those used with the other 200 Series FBMs
- ▶ Baseplate-mounted TA, which mounts directly onto the field I/O connectors of the 200 Series baseplate. These TAs provide field I/O wiring

HighFive PLC

PSS 31H-2S203

Page 2

sales@5gplc.com

+86 13306036024

support for two FBM203/b/c in paired slots (that is, in positions 1 and 2, 3 and 4, 5 and 6, or 7 and 8), as shown in Figure 1.

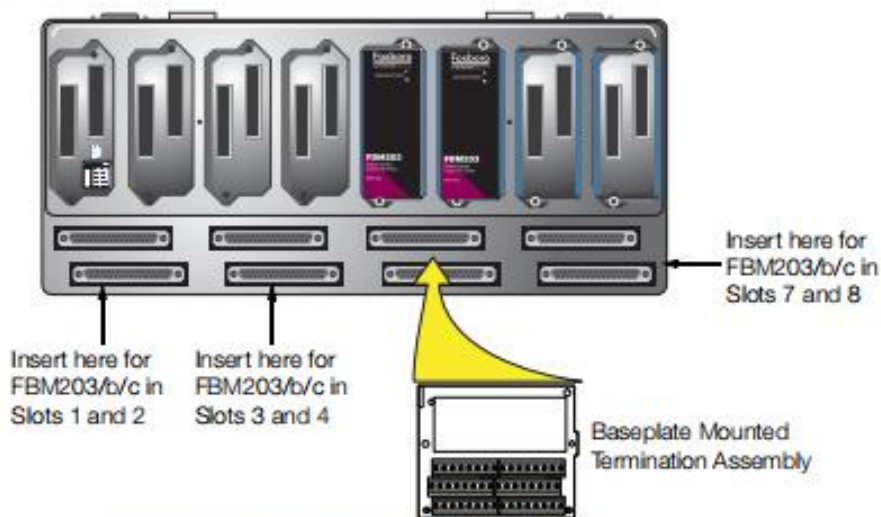


Figure 1. Baseplate-Mounted Termination Assembly

When connected to the appropriate TAs, the FBM203/c/d modules provide functionality formerly provided by the 100 Series FBM I/O subsystem.

The FBM203 can be used with any version of Foxboro Evo™ Control Core Services software that supports I/O FBMs. TAs are available for FBM203 which support the functionality of the 100 Series FBM03A when used with a 3-wire RTD input.

The FBM203c is supported only by I/A Series® software V8.0 to V8.8 or Control Core Services software V9.0 or later. TAs are available for FBM203c, which support the functionality of the 100 Series FBM33A when used with a 3-wire RTD input.

The FBM203d module is supported only by I/A Series software V8.6 to V8.8 or Control Core Services software V9.0 or later. TAs are available for FBM203d, which support the functionality of the

100 Series FBM03B or FBM33B when used with a 2-wire or 4-wire RTD input.

FEATURES

Key features of FBM203/b/c/d modules are:

- ▶ Eight resistance temperature detector (RTD) input channels
- ▶ Each analog input is galvanically isolated
- ▶ Rugged design suitable for enclosure in Class G3 (harsh) environments
- ▶ Execution of an analog input application program that provides conversion time and configurable options for Rate of Change Limits
- ▶ High accuracy achieved by sigma-delta data conversions for each channel
- ▶ Termination Assemblies (TAs) for locally or remotely connecting field wiring to the FBM203/b/c/d.

+86 13306036024

HIGH ACCURACY

For high accuracy, each channel incorporates a Sigma-Delta converter which can provide new analog input values for each channel every 25 ms, and a configurable integration period to remove any process noise and power line frequencies. Each time period, the FBM converts each analog input to a digital value, averages these values over the time period and provides the averaged value to the controller.

STANDARD DESIGN

FBM203/b/c/d have a rugged extruded aluminum exterior for physical protection of the circuits. Enclosures specially designed for mounting the FBMs provide various levels of environmental protection, up to harsh environments, per ISA Standard S71.04.

EASY REMOVAL/REPLACEMENT

The modules can be removed and replaced without removing field device termination cabling, power, or communication cabling.

VISUAL INDICATORS

Light-emitting diodes (LEDs) incorporated into the front of the modules provide visual status indications of fieldbus module functions.

MODULAR BASEPLATE MOUNTING

The modules mount on a DIN rail mounted Modular Baseplate, which accommodates up to four or eight Fieldbus Modules. The baseplate is either DIN rail mounted or rack mounted, and includes signal connectors for redundant fieldbus, redundant independent DC power, and termination cables.

FIELDBUS COMMUNICATION

A Fieldbus Communications Module or a Control Processor interfaces to the redundant 2 Mbps

module Fieldbus used by the FBMs. The FBM203/b/c/d accepts communication from either path (A or B) of the redundant 2 Mbps Fieldbus — should one path fail or be switched at the system level, the module continues communication over the active path.

TERMINATION ASSEMBLIES

Field I/O signals connect to the FBM subsystem via a:

- ▶ DIN rail mounted termination assemblies (TAs), or
- ▶ Baseplate-mounted TA (FBM203/b/c only).

DIN rail mounted TAs for the FBM203/b/c/d are available in the following forms:

- ▶ Compression screw type using Polyamide (PA) material
- ▶ Ring lug type using Polyamide (PA) material

Baseplate-mounted TAs for the FBM203/b/c are available with compression screw type terminals using Polycarbonate/Acrylonitrile Butadiene Styrene (PC/ABS) material.

A removable termination cable connects a DIN rail mounted TA to the FBM via a field connector on the baseplate in which the FBM is installed.

Termination cables are available in the following materials:

- ▶ Polyurethane
- ▶ Low Smoke Zero Halogen (LSZH).

Termination cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the termination assembly to be mounted in either the enclosure or in an adjacent enclosure.

HighFive PLC

PSS 31H-2S203
Page 4

sales@5gplc.com

+86 13306036024



Figure 2. FBM203/b/c/d and DIN Rail Mounted Termination Assembly Installation

FUNCTIONAL SPECIFICATIONS

Input Channels

8 resistance temperature detector (RTD) input channels. Each channel is isolated and independent.

Input Range (Each Channel)

FBM203/203d

0 to 320 ohms. 320 ohms equals 64000 counts. Minimum overrange value is 327.675 ohms at a count of 65535.

FBM203b

0 to 640 ohms. 640 ohms equals 64000 counts. Minimum overrange value is 655.35 ohms at a count of 65535.

FBM203c

0 to 30 ohms. 30 ohms equals 64000 counts. Minimum overrange value is 30.72 ohms at a count of 65535.

Sensor Current

FBM203/203d

0.19 mA DC nominal

FBM203b

0.10 mA DC nominal

FBM203c

0.54 mA DC nominal

Lead Resistance

FBM203/FBM203b

50 ohms maximum each lead. Any imbalance in extension leads will decrease accuracy.

FUNCTIONAL SPECIFICATIONS (CONTINUED)

FBM203c

10 ohms maximum each lead. Any imbalance in extension leads will decrease accuracy.

FBM203d

50 ohms maximum. Any imbalance in extension leads will not affect accuracy.

Input Channels (8)

ANALOG ACCURACY (INCLUDES LINEARITY)

FBM203/d

±0.03% of span

FBM203b

±0.03% of span

FBM203c

±0.1% of span

ACCURACY TEMPERATURE COEFFICIENT

±50 ppm/°C

INPUT SIGNAL A/D CONVERSION

Each channel performs its own A/D signal conversion, using an independent sigma-delta conversion technique.

INTEGRATION PERIOD

Software configurable.

COMMON MODE REJECTION

>125 db at 50 or 60 Hz

NORMAL MODE REJECTION

>95 db at 50 or 60 Hz

Typical Resistance Temperature Sensors

Platinum (DIN), Platinum (SAMA), Platinum (IEC), or Nickel (SAMA)

FBM203/d

Platinum: 100 ohms nominal at 0°C

Nickel: 235 ohms nominal at 0°C

FBM203b

Platinum: 200 ohms nominal at 0°C

Nickel: 470 ohms nominal at 0°C

FBM203c

Copper: 10 ohms nominal at 25°C

Input Signal

Supports 2-, 3- or 4-wire variable-resistance temperature sensors. For 2-wire inputs, there is no correction for lead resistance or lead resistance temperature changes.

Process I/O Communications

Communicates with its associated FCM or FCP via the redundant 2 Mbps module fieldbus.

Input Channel Isolation

Each channel is galvanically isolated from all other channels and earth (ground). The TA/module withstands, without damage, a potential of 600 V AC applied for one minute between any channel and ground, or between a given channel and any other channel.

CAUTION

This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.

Power Requirements

INPUT VOLTAGE RANGE (REDUNDANT)

24 V DC +5%, -10%

CONSUMPTION

3 W (maximum)

HEAT DISSIPATION

3 W (maximum)

HighFive PLC

sales@5gplc.com

PSS 31H-2S203

Page 6

FUNCTIONAL SPECIFICATIONS (CONTINUED)

+86 13306036024

Regulatory Compliance

ELECTROMAGNETIC COMPATIBILITY (EMC)
European EMC Directive 2004/108/EC (Prior to April 20, 2016) and 2014/30/EU (Beginning April 20, 2016)
Meets: EN61326-1:2013 Class A Emissions and Industrial Immunity Levels

RoHS COMPLIANCE
Complies with European RoHS Directive 2011/65/EU

PRODUCT SAFETY

Underwriters Laboratories (UL) for U.S. and Canada

UL/UL-C listed as suitable for use in UL/UL-C listed Class I, Groups A-D; Division 2; temperature code T4 enclosure based systems when connected to specified Foxboro Evo processor modules as described in the *Standard and Compact 200 Series Subsystem User's Guide (B0400FA)*. Communications circuits also meet the requirements for Class 2 as defined in Article 725 of the National Electrical Code (NFPA No.70) and Section 16 of the Canadian Electrical Code (CSA C22.1). Conditions for use are as specified in the *Standard and Compact 200 Series Subsystem User's Guide (B0400FA)*.

European Low Voltage Directive 2006/95/EC (Prior to April 20, 2016) and 2014/35/EU (Beginning April 20, 2016) and Explosive Atmospheres (ATEX) directive 94/9/EC (Prior to April 20, 2016) and 2014/34/EU (Beginning April 20, 2016)

DEMKO certified as Ex nA IIC T4 for use in certified Zone 2 enclosure when connected to specified VA Series processor modules as described in the *Standard and Compact 200 Series Subsystem User's Guide (B0400FA)*.

MARINE CERTIFICATION

ABS Type Approved and Bureau Veritas Marine certified for Environmental Category EC31.

Calibration Requirements

Calibration of the module or termination assembly is not required.

+86 13306036024

ENVIRONMENTAL SPECIFICATIONS⁽¹⁾

Operating

TEMPERATURE

Module

-20 to +70°C (-4 to +158°F)

Termination Assemblies - PA

-20°C to +70°C (-4 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +3,000 m (-1,000 to +10,000 ft)

Storage

TEMPERATURE

-40 to +70°C (-40 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +12,000 m (-1,000 to +40,000 ft)

Contamination

Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.

Vibration

7.5 m/S² (0.75 g) from 5 to 500 Hz

PHYSICAL SPECIFICATIONS

Mounting

MODULES

FBM203/b/c/d modules mount on a Modular Baseplate. The Modular Baseplate can be mounted horizontally or vertically on a DIN rail, or mounted horizontally in a 19-inch rack using a mounting kit. Alternatively, FBM203/c/d mount on a 100 Series conversion mounting structure. Refer to *Standard 200 Series Baseplates* (PSS 31H-2SBASPLT) or *100 Series Conversion Mounting Structures* (PSS 31H-2WB) for details.

TERMINATION ASSEMBLIES

The DIN rail mounted TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm (1.38 in). The baseplate-mounted TA mounts on the two field I/O connectors associated with its two FBM203/b/cs on a 200 Series baseplate.

Weight

MODULE

284 g (10 oz) approximate

TERMINATION ASSEMBLIES

Compression Type (DIN rail mounted):

181 g (0.40 lb) approximate

Compression Type (Baseplate Mounted):

245 g (0.57 lb) approximate

Ring Lug Type: 249 g (0.55 lb) approximate

Dimensions

MODULE

HEIGHT

102 mm (4 in)

114 mm (4.5 in) including mounting lugs

WIDTH

45 mm (1.75 in)

DEPTH

104 mm (4.11 in)

TERMINATION ASSEMBLIES

See page 14 and page 15.

(1) The environmental limits of this module may be enhanced by the type of enclosure containing the module. [Refer to the applicable Product Specification Sheet (PSS) which describes the specific type of enclosure that is to be used.]

PHYSICAL SPECIFICATIONS CONTINUED

+86 13306036024

Part Numbers

MODULE

FBM203
RH914SV (supersedes P0914SV)
FBM203b
RH922UA (supersedes P0922UA)
FBM203c
RH922UD (supersedes P0922UD)
FBM203d
RH927AM (supersedes P0927AM)

TERMINATION ASSEMBLIES

Compression Screw TAs
Polyamide (DIN rail mounted): RH916XJ
(supersedes P0916XJ)
Polycarbonate/Acrylonitrile Butadiene
Styrene (Baseplate Mounted): RH924WN
(supersedes P0924WN)
FBM203d Compression Screw TA
Polyamide: RH924EX (supersedes P0924EX)
Ring Lug TA
Polyamide: P0917JM

Termination Cables

CABLE LENGTHS

Up to 30 m (98 ft)

CABLE MATERIALS

Polyurethane or Low Smoke Zero Halogen
(LSZH)

TERMINATION CABLE TYPE

FBM203/b/c
Type 1 - Refer to Table 2
FBM203d
Type 4 - Refer to Table 3

CABLE CONNECTION

FBM Baseplate End
37-pin D-subminiature
Termination Assembly End
FBM203/b/c
25-pin D-subminiature
FBM203d
37-pin D-subminiature

Construction - Termination Assembly

MATERIAL

DIN Rail Mounted TAs
Polyamide (PA), compression and ring lug
Baseplate-Mounted TAs
Polycarbonate/Acrylonitrile Butadiene
Styrene (PC/ABS), compression

Field Termination Connections

DIN RAIL TA COMPRESSION-TYPE ACCEPTED WIRING SIZES

Solid/Stranded/AWG
0.2 to 4 mm²/0.2 to 2.5 mm²/24 to 12 AWG
Stranded with Ferrules
0.2 to 2.5 mm² with or without plastic collar

BASEPLATE MOUNTED TA COMPRESSION - ACCEPTED WIRING SIZES

Solid/Stranded/AWG
0.2 to 1.5 mm²/0.2 to 1.5 mm²/24 to 16
AWG
Stranded with Ferrules
0.25 to 0.75 mm² with plastic collar
0.25 to 1.5mm² without plastic collar

RING-LUG - ACCEPTED WIRING SIZES

#6 size connectors (0.375 in (9.5 mm))
0.5 to 4 mm²/22 AWG to 12 AWG